

BB + GE
EXPORTS

Pool Products

2019 / STOCK COLLECTION

**Oferta / Offer:**

01 - 200 Uds. de Maletín para electrolisis. / 200 Units of Electrolysis Case.
Precio Ref. Mercado: 450 €

PVP: 180 €

02 - 70 Uds. de bombas de piscina de la marca Davey, modelo SILENSOR 50Hz / 70 Davey SILENSOR 50 Hz Swimming pool pump.
Precio Ref. Mercado: 800 €

PVP: 300 €

03 - 60 Uds. Electrolisi /
Precio Ref. Mercado: 1.299 €

PVP: 500 €

04 - 56 Uds. Eco Salt Clorinator /
Precio Ref. Mercado: 570 €

PVP: 250 €

- **Alta Calidad** de producto. / **High Quality** product.



01



Models

- PP-201: pH
- PP-203: pH · mV · Temperature
- PP-206: pH · mV · Temperature w/Store and Recall
- CTS-406: Conductivity · TDS · Salt · Temperature w/Store and Recall
- PCT-407: pH · mV · Conductivity · TDS · Salt · Temperature w/Store and Recall
- PDO-408: DO · Temperature w/Store and Recall

Specifications

	pH	ORP	Conductivity	TDS	Salt	Temp
Range	-2.00~16.00 pH	-1999 ~ -200 mV -199.9 ~ 499.9 mV 500 ~ 2000 mV	0.0~ 199.9 µS 200~ 1999 µS 2.00~ 19.99 mS 20.0~ 100.0 mS@25°C	0.0~131.9 ppm 132~1319 ppm 1.32~13.19 ppt 13.2~66.7 ppt	0.0~99.9 ppm 100~999 ppm 1.00~9.99 ppt 10.0~50.0 ppt	0~110 °C
Accuracy	±0.01±1 digit	±2±1 digit		±2% FS		±0.2±1 digit 0.1 °C
Resolution	0.01 pH	0.1/1 mV	0.1/1µS/0.01/0.1 mS	0.1/1ppm/0.01/0.1 ppt	0.1/1ppm/0.01/0.1 ppt	
Compensation	ATC: 0~100 °C	N/A		ATC: 0~90 °C		
Power	9V or AC adaptor					
Dimension	96 x 120 x 46 mm(folded)					
Weight	260 g(w/battery)					

Standard Accessories

PP-201	PP-203, PP-206	CTS-406	PCT-407	PDO-408
pH electrode	pH electrode	Conductivity cell	pH electrode	DO probe
Standard solution	Temp. probe	Standard solution	Conductivity cell	Membrane cap x 2 pcs
9V battery	Standard solution	9V Battery	Temp. probe	Electrolyte x 50 ml
Instruction manual	9V battery	instruction manual	Standard solution	9V Battery
Carrying case	Instruction manual	Carrying case	9V Battery	instruction manual
	Carrying case		instruction manual	Carrying case
			Carrying case	
Optional: DC/AC adaptor, ORP electrode				



02


Pool Pumps




Experts in water.



Silensor® 50Hz Pool Pump

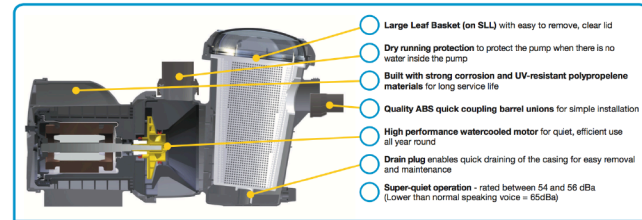


ELECTRICAL DATA									
Type	SLS75	SLS100	SLS150	SLS200	SLS300	SLL150	SLL200	SLL300	SLL400
Voltage (V)	220 / 240								
Supply Frequency (Hz)	50								
Motor Input Power (W/HP)	530/0.7	740/1.0	860/1.2	1090/1.5	1400/1.9	870/1.2	1130/1.5	1400/1.9	1760/2.4
Motor Output Power	371/0.5	525/0.7	620/0.8	775/1.0	950/1.3	635/0.8	830/1.1	960/1.3	1200/1.6
RPM	2850								
Enclosure Class (IP)	56								
Insulation Class	F								
Approval No.	A/10EA								
Lead Length	3m								



OPERATING LIMITS	
Max. water temperature	40°C
Max. ambient temperature	40°C
Noise level (AS 5102.2)	54 to 56dBA

Type	Mounting Holes Diameter	DIMENSIONS (mm)		Net Weight (kg / lbs)
		Inlet PVC	Outlet PVC	
SLS 75	10 x 34 deep	40 / 50	40 / 50	11.0
SLS 100		40 / 50	40 / 50	11.0
SLS 150		40 / 50	40 / 50	11.0
SLS 200		40 / 50	40 / 50	11.5
SLS 300		40 / 50	40 / 50	11.5
SLL 150		40 / 50	40 / 50*	11.5
SLL 200		40 / 50	40 / 50*	12.5
SLL 300		50	50	12.5
SLL 400		50	50	13.0



* Suction & delivery accept 40mm PVC pipe on the I.D. and 50mm fitting on the O.D.

APPLICATIONS

Ideal for most swimming pool applications such as:

- Filtration
- Auto pool cleaning
- Backwashing
- Water features
- Spa jet operation
- Solar pool heating
- Gas and heat pump spa & pool heating

WHY CHOOSE THE Silensor® Series 50Hz pump?

- Super-Quiet** - Designed with a unique water-cooled motor which captures noise and vibrations, allowing super-quiet operation, rated between 54 and 56 dBA. Your neighbours won't even know it's there.
- Long Lasting** - Silensor is designed for long service life in an outdoor, poolside environment and replaces highly corrosible metal components with high performance, long-life plastics for low maintenance and dependable service – year after year.
- Dependable** - Silensor incorporates unique dry run protection to minimise pump damage if no water is available to the pump. It also includes a unique mechanical seal protection for long service life and reduced maintenance.
- Convenient** - By water-cooling the motor, Silensor does not require air ventilation, and gives installers more flexibility with pump positioning.

- SLS models are an ideal replacement for many other pool pump models and are designed to retrofit with minimal hassle.
- SLL models feature a large leaf basket for long intervals between cleaning.



50Hz Super Quiet Pool Pump

Davey's Silensor® Series pool pumps offer super-quiet operation with high efficiency, making them the ideal choice for today's swimming pools.



davey.com.au | daveynz.co.nz

This literature is not a complete guide to product usage. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product installation and Operating Instructions. Must be read in conjunction with the relevant product installation and Operating Instructions.



03



TECHNICAL SPECIFICATIONS

ProMatic 24	
Input Voltage (RMS)	120/240V
Input Current Draw	2/1A
Frequency	50/60Hz
Phase	Single
Maximum Cell Output (DC)	9V/24A
Maximum Pump Current Draw (AUS/NZ)	9A
IP Rating	45
Maximum Chlorine Output	ProMatic model (DAMC24G) 24g/h (0.0529 lbs/h)
Recommended Salt Level	Minimum 4000 ppm - Maximum 6000 ppm
Minimum Pool Size	5kL (1.3kgal US)
Maximum Pool Size	
Cold Climate ≤ 20°C (68°F)	125kL (33.0kgal US)
Temperate Climate 25°C (77°F)	75kL (19.8kgal US)
Hot & Tropical Climate ≥ 30°C (86°F)	55kL (14.5kgal US)
	Climate indicates WATER temperatures during swimming season
Water Temperature Range	>0 to 40°C (32 - 104°F)
Recommended Flow Rate	Minimum 80 LPM (21.5gal/m) – Maximum 400 LPM (106gal/m)
Height	521mm (20.5")
Width	217mm (8.5")
Depth	217mm (8.5")
Weight	6.6kg (14.6lbs)

DAVEY
DAVEY ProMatic®
Salt Water Chlorinator
 Patent Protected
 Model: DAMC24G



Installation & Operating Instructions



04




DAVEY
EcoSalt™
REDOX

Sistema de agua salada para piscinas
Modelo: MC12ORP



Instrucciones de instalación y funcionamiento





BB + GE
EXPORTS

BYBOSSY & GRAU EXPORTS

Calle Córcega, 299, 08008 Barcelona - Spain

+34 609 284 272 | +34 666 442 838

bbexports2019@gmail.com | info@bybossy.com

www.bybossygroup.com